


DRAWINGS / LAYOUTS

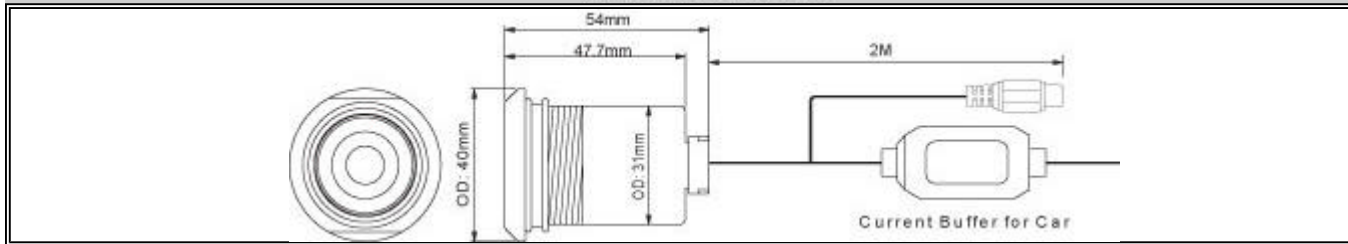

SPECIFICATIONS

Image sensor	1/3" CMOS color
PICTURE ELEMENTS	EIA/ NTSC: 512 Hx492 V - CCIR/ PAL: 512 Hx582 V
HORIZONTAL RESOLUTION	380 Lines
Mirror	
HORIZ. SYNC. FREQUENCY	NTSC: 15.734 KHZ -PAL: 15.625 KHZ
VERTICAL FREQUENCY	NTSC: 60 HZ -PAL: 50 HZ
CLOCK FREQUENCY	NTSC: 19.0699 MHZ -PAL: 18.9375 MHZ
SCANNING SYSTEM	2:1 INTER LACE
S/N RATIO	40 dB
ELECTRONIC SHUTTER	NTSC: 1/60-1/2,000 sec -PAL: 1/50-1/2,000 sec
LENS	6.0mm f2.0
VIDEO OUTPUT	1Vp-p, 75 Ohms
GAMMA	0.45
POWER SUPPLY	12V DC 60ma
Dimensions	40 x 54mm
WEIGHT	55g
Enclosure	Stainless Steel IP67 (Weatherproof)
Connectors	Molded cables supplied
STORAGE TEMPERATURE	-30°C-60°C
OPERATION TEMPERATURE	-10°C-45°C